D1RFRD006



序号/RevNO	名称/Title	文件编号/FileNO
1		
2		
3		
4		
5		

pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to	∩ / ▯
± 0.10	± 0.15	± 0.25	± 0.20	± 0.30	± 0.50	± 0.7	± 1.0	0.05/10



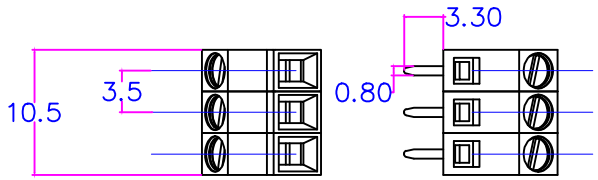

Poles:2P/3P-24P
Pitch:3.5mm
Voltage Rating:300V
Current Rating:8A
Wire range:28-16AWG
Housing:PA66(UL 94V-0)
Wire cage:Brass,Ni plated
Pin header:Brass,Tin Plated
Screw:M2,Steel(Q235),Zinc Plated
Torque:0.4N.m

设计/Designed by.	绘图/Drawing by.	审核/Checked by.	批准/Approved by.	未注公差 Gener al Tolerance
图名/Title	文件编号/FileNO	慈溪市美感电子接插件厂 Cixi Meigan Electric Appliance Socket Factroy		.X ± 0.3 / .XX± 0.15 / X° .± 2° / .X° ± 1° / .XX° ± 0.5°
MG127S-5.0	页序/Sheet			
备注/Remark		视图/PROJECTION		单位/Units:mm

序号/RevNO	更改记录/Revision note	签名/Signature	日期/Date

H G F E D C B A

8 7 6 5 4 3 2 1